
P1197E-500


19" SXGATFT Expandable Industrial Touch Panel Computer with 7th/6th Gen Intel® Core™ i7/i5/i3, Celeron® & Pentium® Processor. PCI/PCIe Slot

Features

- 19" SXGA TFT LCD display
- LGA1151 socket 7th/6th gen Intel® Core™ i7/i5/i3, Celeron® & Pentium® processor
- Intel® H110 chipset
- Less screw design for easy installation
- 4 USB 3.0, 2 USB 2.0 and 4 COM
- One PCIe x4 or one PCIe expansion slots
- Built-in speakers and optional Wi-Fi 802.11 b/g/n module
- Robust aluminum with IP65 compliant front bezel design



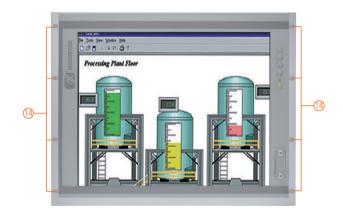

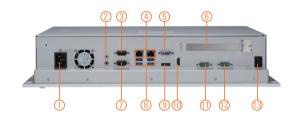

- 1. AC plug
- 2. Audio (Mic-in/Line-out) 7. 1
- 3. 1 x RS-232/422/485
- 4. 2 x LAN
- 5. VGA
- 6. PCle x4 or PCl 7. 1 x RS-232
- 8. 4 x USB 3.0
- 9. 1 x DisplayPort
- 12. 1 x RS-232
- 13. Power switch

11. 1 x RS-232

14. Rack mount hole







Introduction

The P1197E-500 is a multimedia 19" touch panel PC for kiosk application. It has a fashionable mechanism design and industrial-grade material front bezel which can avoid damage from chemical corrosion. To meet the demands of multimedia application, the P1197E-500 is powered by a high performance LGA1151 socket 7th/6th generation Intel® Core™ processor with the Intel® H110 chipset. It features four COM ports, two Gigabit Ethernet and up to 32GB memory of dual-channel DDR4-2133 that delivers high computing capability for high performance-demanding applications. The industrial touch panel PC is most suitable for kiosk, factory and automation.

Expandable for 1 PCIe or 1 PCI

The P1197E-500 has one PCle x4 or one PCl slot for expansion purpose. User can easily plug in standard half-size PCl or PCle card based on any application needs.

Speaker and WLAN Antenna Supported

The P1197E-500 is equipped with built-in speakers for multimedia applications. It also supports WLAN module antenna (optional) for wireless network connectivity.

Friendly Less Screw Design

The P1197E-500 is designed with ease of maintenance in mind. There are only three screws on the back chassis, so that technicians can quickly remove the system's back cover with minimum effort.

Specifications

Front Bezel	Aluminum w/ IP65/	Aluminum w/ IP65/NEMA 4 rugged protection	
LCD Panel	Display Type	19" SXGA TFT LCD	
	Brightness	250 nits	
	Resolution	1280 x 1024 pixels	
	Viewing Angle	170°/160°	
Main System	CPU	LGA1151 socket 7th/6th gen Intel® Core™ i7/i5/i3, Celeron® & Pentium® processor	
	Chipset	Intel® H110	
	System Memory	2 x 288-pin DDR4-2133 Long-DIMM, up to 32GB	
	BIOS	AMI UEFI BIOS	
	Storage	1 x 3.5" or 1 x SATA HDD (9.5 mm height)	
	Drive	1 x Built-in slim DVD-RW (optional)	
	Watchdog Timer	255 levels, 1 to 255 sec.	

Specifications

IO Connector 3 x RS-232 1 x RS-232/422/485 1 x HDMI 1 x VGA		
1 x DisplayPort 4 x USB 3.0 2 x USB 2.0 2 x 10/100/1000 Mbps Ethernet (Intel® 1 x Audio (Mic-in & Line-out)	® i219-LM/i211-AT)	
TPM N/A		
Expansion Interface 1 x PCle x4 or 1 x PCl		
Touchscreen 5-wire resistive type Light transmission 79% 1 million activations (typical) at a single		
Power Supply 100 to 240 VAC, 200W		
Power Consumption 157W		
Dimensions 482 mm (18.98") (W) x 94.7 mm (3.73") (14.99") (H)	(D) x 380.8 mm	
Packing Dimensions 615 mm (24.21") (W) x 250 mm (9.84") (D	0) x 585 mm (23.03") (H)	
Weight(net/gross) 8 kg (17.64 lb)/10.4 kg (22.93 lb)		
Operating temperature 0°C to +45°C (+32°F to +113°F)		
Relative humidity 10% to 90% @ +40°C, non-considering	10% to 90% @ +40°C, non-considering	
Operating vibration 1.0G, 5 - 500 Hz, random	1.0G, 5 - 500 Hz, random	
Certifications CE	CE	

Packing list

- 1 x P1197E-500 1 x Panel mount kit 1 x US power cord

Ordering Information

P1197E-500 with PCIe (P/N: E221197104)	19" SXGA expandable industrial touch panel computer with LGA1151 socket 7th/6th gen Intel® Core™ i7/i5/i3, Pentium® & Celeron® processor, resistive touch screen, PCle x4 slot and 100 to 240 VAC
P1197E-500 with PCI (P/N: E221197105)	19" SXGA expandable industrial touch panel computer with LGA1151 socket 7th/6th gen Intel® Core™ i7/i5/i3, Pentium® & Celeron® processor, resistive touch screen, PCI slot and 100 to 240 VAC

Optional Accessories

Wi-Fi kit	
881211970A0E	VESA & wall mount kit
E981604011	ATC10 (VESA arm clamp type)
E981604012	ATW10 (VESA arm wall mount)
E221177116	Stand kit

Optional EOS Installation

Windows® 10 IoT Enterprise


Optional OS Installation

Windows® 10



▲ Less screw design

Dimensions

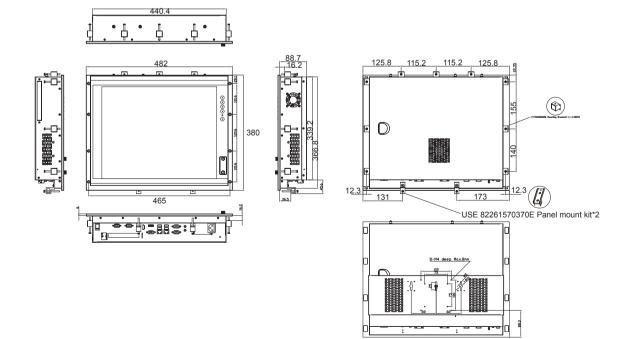

^{*} Other configuration by request * Specification and certifications may vary based on different requirements