


Features

- 15.6" Industrial Compact Size Panel PC
- Apollo Lake Intel N4200
- On Board 4GB
- Flat Front Panel Touch Screen
- IP66 Compliant Front Panel
- Optional Projected Capacitive Touchscreen Support 7H Anti-scratch Surface
- DC 9~36V Wide-ranging Power Input
- High Brightness 1,000 nits option

Specifications

System		
CPU	Intel Pentium N4200 Processor (2M Cache, 1.1GHz)	
System Chipset	SoC	
Memory	Onboard 4GB DDR3L SDRAM	
I/O Port		
USB	2 x USB 3.0 type A	
Serial / Parallel	1 x RS-232/422/485 DB9 (COM1), default RS-232 1 x RS-232 DB9 (COM2)	
Audio	1 x Audio Line Out	
LAN	2 x GbE LAN RJ-45	
Power	1 x 3-pin Terminal Block Connector 1 x 2-pin Power Switch connector	
Storage Space		
HDD	1 x 2.5" SATA3 HDD space	
Movable Device	1 x Micro SD card slot	
Expansion		
Onboard Expansion bus	1 x Mini-PCIe slot (full size) 1 x Micro SIM slot	
Display		
	Standard	Optional
Display Type	15.6" TFT-LCD	15.6" TFT-LCD
Max. Resolution	1366 x 768	1920 x 1080
Max. Color	16.7M	16.2M
Luminance (cd/m ²)	400	1000
View Angle	170(H)/160(V)	170(H)/170(V)
Contrast	500:1	800:1
Backlight Lifetime	50,000 hrs	50,000 hrs
Touch Screen		
Type	Resistive Touch Projected Capacitive Touch (for P Model)	
Interface	USB	
Light Transmission(%)	Resistive Touch: 80% Projected Capacitive Touch: 90%	
Mechanical		
Construction	Aluminum Die-casting Chassis	
Mounting	Panel Mount, VESA 100 x 100	
Dimensions (WxHxD)	412 x 277.5 x 58.9 mm	
IP Rating	IP66 Compliant Front Bezel	
Net Weight	4.8 kg	

Dimensions

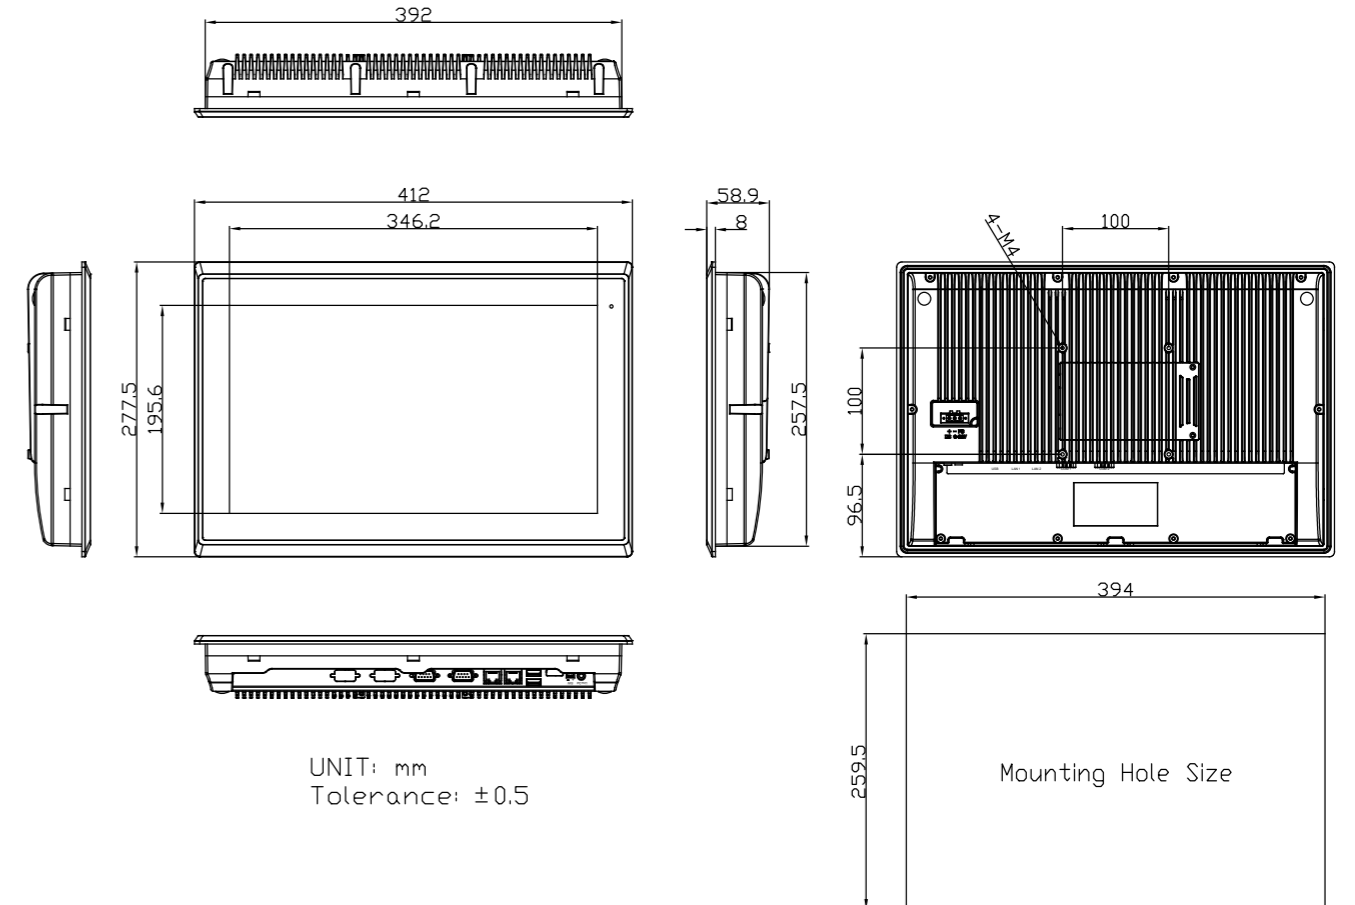

Power	
Power Input	DC 9~36V
Power Consumption	30W (MAX)
Environmental	
Operating Temperature	0~50°C / -20~60°C (option)
Storage Temperature	-30~70°C
Humidity	10 to 90%@ 40°C, non-condensing
Certificate	CE/FCC Class A/UL
Operating System Support	
Windows 10 IoT	