

# RMS251B - 2U Industrial Rackmount Computer System

## Specifications

### Material of Chassis

### Front Door

### Standard Color

### Front Panel Connector

### Indicators

### Front Panel Controls

### Cooling Fan

### System Board Size

### Drive Bays

### Expansion Slots

### Power Supply

### Net Weight

### Dimension (W x H x D)

### Operation Temperature

### Non-Operating Temperature

### Operating Relative Humidity

### Non-Operating Relative Humidity

## Chassis Features

Heavy Duty Cold Rolled Electroplated Steel

Single Door With 2 Thumbscrews, Washable Air Filter(Inside Front Panel)

Black

2 x USB 2.0  
1 x PS/2

LEDs for Power ON/OFF, HDD Activity

Power ON/OFF Momentary(Rocker), System Reset

3 x (80mm = 42.5CFM ea.) Fans

13.3 x 4.8 Inch (Single Board Computer)

2 x 3.5" Swappable Drive Bays  
1 x 5.25" Slim Optical Drive Bay

2 x Full Size Slots, 3 x Half Size Slots

PS/2 ATX PFC 110/220 VAC Power Supply

29.5 lbs

19 x 3.5 x 17.7 Inch (483 x 88 x 450mm)

## Environmental

50° to 95°F (Regular Motherboard)

32° to 140°F (Industrial Motherboard and Single Board Computer)

-40° to 158°F

8% to 90% (non-condensing)

5% to 95% (non-condensing)




### Broadax Systems, Inc.


17539 E. Rowland Street  
City of Industry, CA 91748  
626-964-2600 phone  
626-964-2665 fax  
www.bsicomputer.com  
info@bsicomputer.com

# RMS251B - 2U Industrial Rackmount Computer System


## Mechanical Drawing

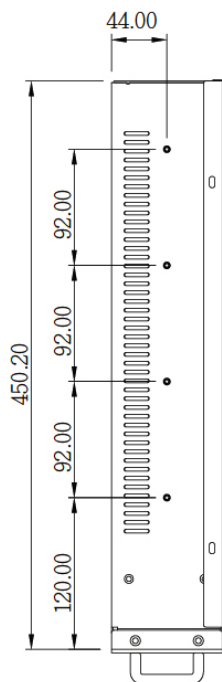


Left-side View

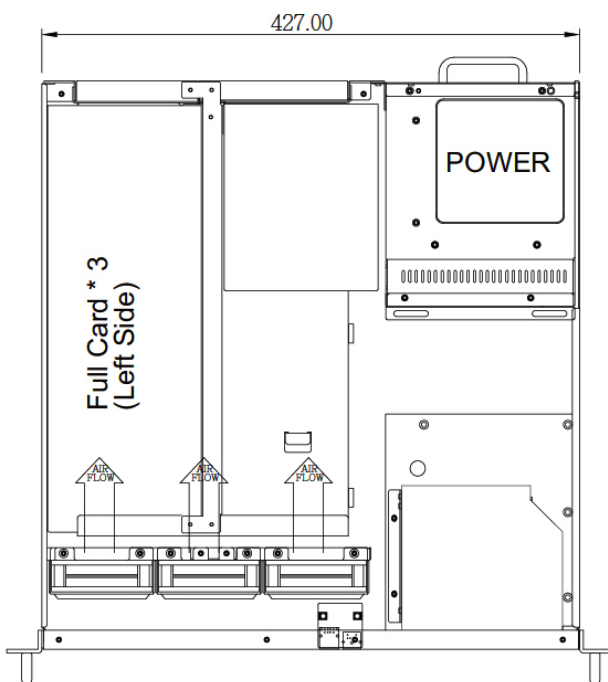


Top View




Right-side View



Rear view



Front in-side view

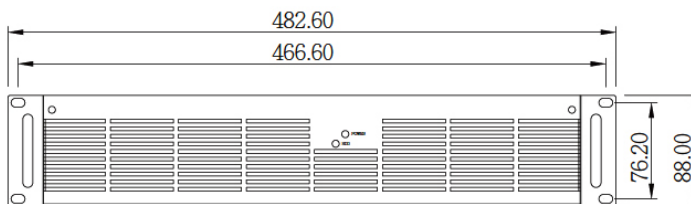

Front out-side view