RMS242-AMD 2U Industrial Rackmount Computer System

Specifications

	Chassis Features
Material of Chassis	Heavy-duty preplated SGCC cold-rolled steel
Standard Color	Black
Front Panel	Power Button, Reset Button
Front Panel Connector	2 x USB Ports
Indicators	Power status, LAN activity and Drive activity
Handles Color	Silver
Front Panel Controls	Power ON/OFF, System Reset
Cooling Fan	4 x 60x38mm easy swap fans
System Board Size	Up to EATX Motherboard (12" x 13")
Drive Bays	4 x 2.5" Hot-swap Drive Bays
Expansion Slots	2 x Expansion Slots
Power Supply	, \$\$K `FYXi bXUbh', \$Ž `D`Uh]bi a `Dck Yf`Gi dd`m
Weight	&, ") ``Vg
Dimension (W x H x D)	%+"&('I '' '') 'I '%+"+ Inch
	Environmental
Operation Temperature	50° to 95°F (Regular Motherboard)
	32° to 140°F (Industrial Motherboard)
Non-Operating Temperature	-40° to 158°F
Operating Relative Humidity	8% to 90% (non-condensing)
Non-Operating Relative Humidity	5% to 95% (non-condensing)




Since 1986

© 2023 Broadax Systems, Inc. All rights reserved. Specifications subject to change without notice. BSI and the BSI logo are trademarks of Broadax Systems, Inc. Intel, Pentium, Xeon are registered trademarks or trademarks of Intel Corporation. Microsoft, Windows are registered trademarks or trademarks of Microsoft Corporation.

RMS242-AMD 2U Industrial

Rackmount Computer System

Mechanical Drawing

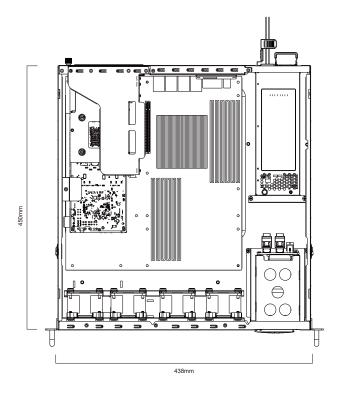

٨

© 2023 Broadax Systems, Inc. All rights reserved. Specifications subject to change without notice. BSI and the BSI logo are trademarks of Broadax Systems, Inc. Intel, Pentium, Xeon are registered trademarks or trademarks of Intel Corporation. Microsoft, Windows are registered trademarks or trademarks of Microsoft Corporation.