


SuperServer F628R2-FTPT+

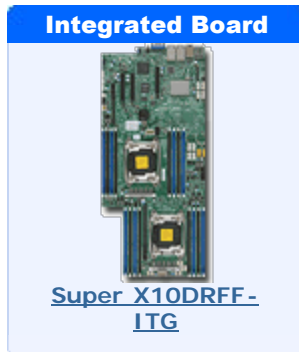

Key Features

4 Hot-plug System Nodes in 4U Front I/O. Each node supports:

1. Dual socket R3 (LGA 2011) supports Intel® Xeon® processor E5-2600 v3 family; QPI up to 9.6GT/s
2. Up to 1TB ECC DDR4 2133MHz; 16x DIMM slots
3. 2x PCI-E 3.0 x8 (Low Profile) slots
4. Front I/O ports: 2 10GBase-T, 2 USB 3.0, and 1 VGA connector
5. Built-in Server management tool (IPMI 2.0, KVM/media over LAN) with dedicated LAN port
6. 6x 2.5" Hot-swap SATA3 HDDs
7. 1280W Redundant Power Supplies **Platinum Level (95%)**

Note: Image above may show a varied configuration or optional parts, Please refer to parts list for standard parts included.

Specifications

Product SKUs

SYS-F628R2-FTPT+	▪ SuperServer F628R2-FTPT+ (Black)
-------------------------	---

Motherboard

Super X10DRFF-ITG

Processor/Cache

CPU	▪ Intel® Xeon® processor E5-2600 v3 family (up to 145W TDP) * ▪ Dual Socket R3 (LGA 2011)
------------	--

Cores / Cache	▪ Up to 18 Cores / Up to 45MB Cache
----------------------	-------------------------------------

System Bus	▪ QPI up to 9.6 GT/s
-------------------	----------------------

Note * Please contact Supermicro Technical Support for additional information about frequency optimized CPUs and specialized system optimization.

System Memory

Memory Capacity	▪ 16x 288-pin DDR4 DIMM slots ▪ Up to 1TB ECC LRDIMM, 512GB ECC RDIMM
------------------------	--

Chassis

Form Factor	▪ 4U Rackmount
--------------------	----------------

Model	▪ CSE-F424BF-R1K28B
--------------	----------------------------

Dimensions and Weight

Width	▪ 17.63" (448mm)
--------------	------------------

Height	▪ 6.96" (177mm)
---------------	-----------------

Depth	▪ 29" (737mm)
--------------	---------------

Package	▪ 28.3" (W) x 15.0" (H) x 42.4" (D)
----------------	-------------------------------------

Weight	▪ Net Weight: 105 lbs (47.63 kg) ▪ Gross Weight: 150 lbs (68.04 kg)
---------------	--

Available Colors	▪ Black
-------------------------	---------

Front Panel

Buttons	▪ Power On/Off button ▪ System Reset button
----------------	--

LEDs	▪ Power status LED ▪ Hard drive activity LED ▪ 2x Network activity LEDs ▪ System Overheat LED ▪ Power fail LED
-------------	--

Memory Type	<ul style="list-style-type: none"> 2133/1866/1600MHz ECC DDR4 SDRAM 72-bit
DIMM Sizes	<ul style="list-style-type: none"> RDIMM: 32GB, 16GB, 8GB, 4GB LRDIMM: 64GB, 32GB
Memory Voltage	<ul style="list-style-type: none"> 1.2 V
Error Detection	<ul style="list-style-type: none"> Corrects single-bit errors

On-Board Devices

Chipset	<ul style="list-style-type: none"> Intel® C612 chipset
SATA	<ul style="list-style-type: none"> SATA3 (6Gbps) with RAID 0, 1, 5, 10
IPMI	<ul style="list-style-type: none"> Support for Intelligent Platform Management Interface v.2.0 IPMI 2.0 with virtual media over LAN and KVM-over-LAN support ASPEED AST2400 BMC
Network Controllers	<ul style="list-style-type: none"> Intel® X540 Dual Port 10GBase-T Virtual Machine Device Queues reduce I/O overhead Supports 100BASE-TX, 1000BASE-T, 10G Base-T; RJ45 output 1x Realtek RTL8211E PHY (dedicated IPMI)
Graphics	<ul style="list-style-type: none"> ASPEED AST2400 BMC

Input / Output (per node)

SATA	<ul style="list-style-type: none"> 6x SATA3 (6Gbps) ports
LAN	<ul style="list-style-type: none"> 2x RJ45 10GBase-T LAN ports 1x RJ45 Dedicated IPMI LAN port
USB	<ul style="list-style-type: none"> 2x USB 3.0 ports
VGA	<ul style="list-style-type: none"> 1x VGA port
Serial Port / Header	<ul style="list-style-type: none"> 1x Fast UART 16550 port

Expansion Slots (per node)

PCI-Express	<ul style="list-style-type: none"> 2x PCI-E 3.0 x8 (Low Profile) slots
--------------------	---

Drive Bays (per node)

Fixed	<ul style="list-style-type: none"> 6x 2.5" Hot-swap SATA3 HDD trays
--------------	--

Backplane

1x SATA3 backplane

System Cooling

Fans	<ul style="list-style-type: none"> 8x 8cm 9.5K heavy duty, hot swappable fans with air shroud and PWM fan speed control
-------------	--

Power Supply

1280W Redundant High-efficiency Digital Power Supplies w/ PMBus 1.2

AC Input	<ul style="list-style-type: none"> 1000W Output @ 100-140V, 8-12A, 50-60Hz 1280W Output @ 180-240V, 6-8A, 50-60Hz
DC Output	<ul style="list-style-type: none"> 1000W: +12V/83A; +5Vsb/4A 1280W: +12V/106.7A, +5Vsb/4A

Certification



Platinum Certified
[[Test Report](#)]

System BIOS

BIOS Type	<ul style="list-style-type: none"> 128Mb SPI Flash EEPROM with AMI BIOS
BIOS Features	<ul style="list-style-type: none"> Plug and Play (PnP) APM 1.2 PCI 2.3 ACPI 1.0 / 2.0 / 3.0 / 4.0 USB Keyboard support SMBIOS 2.7.1 UEFI 2.3.1

Operating Environment / Compliance

RoHS	<ul style="list-style-type: none"> RoHS Compliant
Environmental Spec.	<ul style="list-style-type: none"> Operating Temperature: 10°C to 35°C (50°F to 95°F) Non-operating Temperature: -40°C to 70°C (-40°F to 158°F) Operating Relative Humidity: 8% to 90% (non-condensing) Non-operating Relative Humidity: 5% to 95% (non-condensing)

Parts List

Parts List - (Items Included)

	Part Number	Qty	Description
Motherboard / Chassis	MBD-X10DRFF-ITG	4	Super X10DRFF-ITG Motherboard
	CSE-F424BF-R1K28B	1	4U Chassis
Backplane	BPN-ADP-F418L	4	BPN;SASADP;SAS827-H8;H8DTT;cable req
Backplane	BPN-SAS-F424-B6	4	6x hot swappable 2.5
Cable 1	CBL-0460L-02	4	8 pin Male to two 4 pin Male power cable, 10cm and 7cm. 18AWG
Cable 2	CBL-0157L-02	8	8 pin to 8 pin ribbon SGPIO cable, 27cm, PBF
Cable 3	CBL-0473L	24	21cm 30AWG SATA S-S cable
Label	LBL-0108	1	CAUTION LABEL FOR REDUNDANT PWR SYSTEMS
Manual	MNL-1738-QRG	1	Quick Reference Guide for F628R2-FT+ / FTPT+
Heatsink / Retention	SNK-P0048PS	8	2U Passive CPU Heat Sink for X9, X10 Generation Systems Equipped w/ a Narrow ILM MB
Power Supply	PWS-1K28P-SQ	4	1U 1280W, redundant single output power supply

Optional Parts List

	Part Number	Qty	Description
Software	SFT-OOB-LIC	4	OOB Management Package (per node license)
Software	SFT-DCMS-Single	4	DataCenter Management Package (per node license)