


GOT5103W-845

10.1" WXGA TFT Fanless Touch Panel
Computer with Intel® Celeron® Processor
N3060 (up to 2.48 GHz)

NEW



1. Power LED
2. HDD LED
3. Brightness adjust
4. Display On/Off
5. Volume adjust
6. Mic-in (optional)

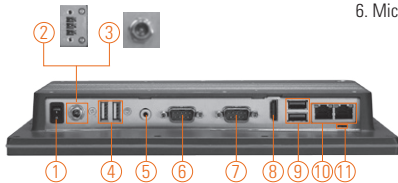

- | | | |
|--|---------------------------|-------------------|
| 1. Power switch (ATX) | 5. Audio (Line-out) | 10. Ethernet x 2 |
| 2. Terminal block for DC power input or screw conn. w/AC power adapter | 6. COM 1 (RS-232/422/485) | 11. AT/ATX switch |
| 3. USB 2.0 x 2 | 7. COM 2 (RS-232) | 12. Speaker |
| | 8. HDMI | |
| | 9. USB 3.0 x 2 | |

Features

- 10.1" WXGA wide screen TFT LCD display with LED backlight
- Supports 10.1" projected capacitive multi-touch
- Fanless design with Intel® Celeron® processor N3060 2 cores (up to 2.48 GHz)
- Supports mSATA & Half-slim SATA SSD (optional)
- Supports 2 Gigabit LAN, 4 USB, 2 COM ports, 2W speakers and optional Mic-in.
- IP65 front bezel and IPX1 full enclosure design
- Supports optional panel mount/VESA arm/desktop stand/wall mount
- Supports external AT/ATX mode selection switch



▲ Side view



Introduction

The GOT5103W-845 is a 10.1" Intel® Celeron® processor fanless touch panel computer. In response to market demand, this panel computer is a cost effective solution. It adopts a modern, sleek and fanless design and is equipped with a 10.1" TFT LCD as well as Intel® Celeron® processor N3060 2 cores up to 2.48 GHz. For wireless network connection, the GOT5103W-845 offers 2 PCIe Mini Card slots. By just installing a mini card WLAN card and antennas, customers can have instant access to wireless LAN/GPRS/GSM/4G environments. Besides, it provides two types of power input. One is DC power input, optional 24 VDC or 9-36 VDC with terminal block connector, and another is AC power adapter with screw type connector.

Slim & lightweight design

The GOT5103W-845 is slim and lightweight which make it fit for limited space installation.

Optional internal WLAN antenna

The GOT5103W-845 provides 2 PCIe Mini Card slots and optional internal WLAN antennas for wireless network connections, customers can use the GOT5103W-845 in wireless LAN/GPRS/GPS/4G environment.

Support front membrane keys

The GOT5103W-845 provides 5 membrane keys in front of system, people can adjust the system display, volume and brightness.

Specifications

Front Bezel	IP65, plastic front bezel	
LCD Panel	Display Type	10.1" WXGA TFT LCD with LED backlight
	Brightness (cd/m ²)	350 nits
	Resolution	1280 x 800
Main System	CPU	Intel® Celeron® processor N3060 2 cores (up to 2.48 GHz)
	System Memory	1 x 204-pin DDR3L-1600 MHz SO-DIMM max. up to 8 GB
	BIOS	AMI UEFI BIOS
	Storage	1 x Half-slim SATA SSD (for GOT5103W-845-PCT-J, optional) 1 x mSATA
	Watchdog Timer	255 levels, 0-255 sec.
	Onboard Graphics	Integrated Intel® HD GFX



Specifications

I/O Connector	1 x RS-232 (COM 2) 1 x RS-232/422/485 (default RS-232, COM 1) 1 x HDMI 1 x Switch for power On/Off 1 x AT/ATX mode selection switch 2 x USB 2.0 2 x USB 3.0 1 x Audio (Line-out) 2 x 10/100/1000 Mbps Ethernet (Intel® i211AT)
Expansion Interface	1 x Full-size PCI Express Mini Card with mSATA supported 1 x Full-size PCI Express Mini Card with SIM slot
Touchscreen	Projected capacitive multi-touch
Power Supply	1.AC version: 100-240V AC-DC 60W power adapter or 2.DC version: 9-36 VDC with over current protection fuse or 3.DC version: 24 VDC over current protection fuse
Dimensions	260.8 mm (10.27") (W) x 38 mm (1.50") (D) x 194.1 mm (7.65") (H)
Packing Dimensions	380 mm (14.96") (W) x 100 mm (3.94") (D) x 280 mm (11.02") (H)
Weight (net/gross)	1.08 kg (2.38 lb)/2.18 kg (4.8 lb)
Environment	Operating temperature: 0° ~ +50°C (+32°F ~ +122°F) Storage Temperature: 0° ~ +50°C (+32°F ~ +122°F) Relative humidity: 20% ~ 90% @ 40°C; non-condensing Operation vibration: 2G, 10 ~ 500Hz, random for SSD
Certificate	CE

* W.T.: Wide Temperature. All W.T. supported products have to be sorted by Axiomtek.

Ordering Information

Standard	
GOT5103W-845-PCT-J	10.1" WXGA fanless touch panel computer with Intel® Celeron® processor N3060, projected capacitive multi-touch screen, AC-DC 60W power adapter (screw type connector) and EMI class A
GOTG5103W-845-PCT-DC	10.1" WXGA fanless touch panel computer with Intel® Celeron® processor N3060, projected capacitive multi-touch screen, and 9-36VDC power input (terminal block connector)
GOT5103W-845-PCT-24VDC	10.1" WXGA fanless touch panel computer with Intel® Celeron® processor N3060, projected capacitive multi-touch screen, and 24VDC power input (terminal block connector)

Optional	
Wi-Fi + Bluetooth kit	
Panel mount kit	
Half slim SATA SSD bracket kit	
RFID kit	

Optional EOS Installation

WES7
WEBS (64-bit)

Optional OS Installation

Windows® 7
Windows® 8.1 (64-bit)
Windows® 10

Dimensions

