


SuperStorage Server 6027R-E1CR12N



Rear Hot-Swap Drive Bay not Supported

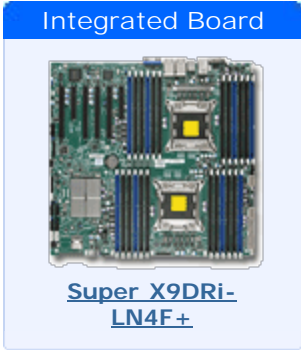

Available Colors: Black

Key Features

1. Dual socket R (LGA 2011) supports Intel® Xeon® processor E5-2600 and E5-2600 v2 family†
2. Up to 1.5TB ECC DDR3, up to 1866MHz; 24x DIMM slots
3. 4x PCI-E 3.0 x16, 1x PCI-E 3.0 x8, 1x PCI-E 3.0 x8 (in x4) slots; Slots 1 and 2 occupied by HW RAID controller and JBOD expansion port
4. Intel® i350 GbE Controller; 4x ports
5. 12x 3.5" Hot-swap SAS3/SATA3 HDD bays w/ SES2; Optional Internal bracket for 2x 2.5" drives (fixed mounting)
6. Hardware RAID via LSI 3108 controller
7. Server remote management: IPMI 2.0 / KVM over LAN / Media over LAN
8. 3x 8cm high-performance PWM fans
9. 920W Redundant Power Supplies Platinum Level (94%)

Note: Image above may show a varied configuration or optional parts, Please refer to parts list for standard parts included.

Specifications

Product SKUs

SSG-6027R-E1CR12N ■ SuperServer 6027R-E1CR12N (Black)

Motherboard

Super X9DRi-LN4F+

Processor/Cache

CPU ■ Dual Socket R (LGA 2011)
 ■ Intel® Xeon® processor E5-2600 and E5-2600 v2 family† (up to 130W TDP)

Note † BIOS version 3.0 or above is required

Cache ■ Up to 30MB

System Bus ■ QPI up to 8 GT/s

System Memory

Memory Capacity ■ 24x 240-pin DDR3 DIMM slots
 ■ Up to 1.5TB DDR3 ECC LRDIMM
 ■ Up to 768GB DDR3 ECC Registered memory (RDIMM)

Chassis

Form Factor ■ 2U Rackmount

Model ■ CSE-826BE1C-R920LPB

Dimensions

Width ■ 17.2" (437mm)

Height ■ 3.5" (89mm)

Depth ■ 25.5" (648mm)

Gross Weight ■ 61 lbs (27.7 kg)

Available Colors ■ Black

Front Panel

Buttons ■ Power On/Off button
 ■ System Reset button

LEDs ■ Power status LED
 ■ Hard drive activity LED
 ■ 2x Network activity LEDs
 ■ System Overheat LED
 ■ Power fail LED

Expansion Slots

	Up to 192GB DDR3 ECC Un-Buffered memory (UDIMM)
Memory Type	<ul style="list-style-type: none"> 1866/1600/1333/1066/800MHz ECC DDR3 SDRAM 72-bit, 240-pin gold-plated DIMMs
DIMM Sizes	<ul style="list-style-type: none"> 32GB, 16GB, 8GB, 4GB, 2GB, 1GB
Memory Voltage	<ul style="list-style-type: none"> 1.5 V, 1.35 V
Error Detection	<ul style="list-style-type: none"> Corrects single-bit errors Detects double-bit errors (using ECC memory)

On-Board Devices

Chipset	<ul style="list-style-type: none"> Intel® C602 Chipset
SATA	<ul style="list-style-type: none"> SATA 2.0 3Gbps with RAID 0, 1, 5, 10 SATA 3.0 6Gbps with RAID 0, 1, 5, 10
SAS3 AOC	<ul style="list-style-type: none"> LSI 3108 SAS3 AOC Hardware RAID 0, 1, 5, 6, 10, 50, 60
IPMI	<ul style="list-style-type: none"> Support for Intelligent Platform Management Interface v.2.0 IPMI 2.0 with virtual media over LAN and KVM-over-LAN support Nuvoton WPCM450 BMC
Network Controllers	<ul style="list-style-type: none"> Intel® i350 Gigabit Ethernet Virtual Machine Device Queues reduce I/O overhead Supports 10BASE-T, 100BASE-TX, and 1000BASE-T, RJ45 output 1x Realtek RTL8201N PHY (dedicated IPMI)
Graphics	<ul style="list-style-type: none"> Matrox G200eW

Input / Output

Serial ATA	<ul style="list-style-type: none"> 2x SATA 3.0 ports (6Gbps) 8x SATA 2.0 ports (3Gbps)
SAS	<ul style="list-style-type: none"> 8x SAS3 ports (12Gbps)
LAN	<ul style="list-style-type: none"> 4x RJ45 Gigabit Ethernet LAN ports 1x RJ45 Dedicated IPMI LAN port
USB	<ul style="list-style-type: none"> 9x USB 2.0 ports total (4x rear + 4x via header + 1x Type A)
VGA	<ul style="list-style-type: none"> 1x VGA port
Serial Port / Header	<ul style="list-style-type: none"> 1x Fast UART 16550 port / 1 Header

PCI-Express	<ul style="list-style-type: none"> 4x PCI-E 3.0 x16 slots 1x PCI-E 3.0 x8 slot 1x PCI-E 3.0 x8 (in x4) slot Slot 1 & 2 Occupied by Hardware RAID Controller and JBOD Expansion Port
-------------	---

Drive Bays

Hot-swap	<ul style="list-style-type: none"> 12x 3.5" Hot-swap SAS3/SATA3 HDD bays w/ SES2
Optional	<ul style="list-style-type: none"> Internal bracket for 2x 2.5" drives (fixed)

Backplane

SAS3 Backplane: SAS3 12Gbps single expander backplane, w/ LSI SAS3x28 expander, support 12x 3.5" drives, with 4x mini-SAS HD connectors, 2 for uplink and another 2 for downlink

System Cooling

Fans	<ul style="list-style-type: none"> 3x 8cm 9.5K RPM, 4-pin PWM fans
------	---

Power Supply with Power Distributor

920W high-efficiency (94%+) AC-DC Redundant power supplies with PMBus and I2C

AC Input	<ul style="list-style-type: none"> 100-240 V, 50-60 Hz, 11-4.5 Amp
DC Output	<ul style="list-style-type: none"> 4 Amp @ +5V standby 75 Amp @ +12V

Certification



Platinum Certified
[[Test Report](#)]

System BIOS

BIOS Type	<ul style="list-style-type: none"> 128Mb SPI Flash EEPROM with AMI BIOS
BIOS Features	<ul style="list-style-type: none"> Plug and Play (PnP) APM 1.2 PCI 2.2 ACPI 1.0 / 2.0 USB Keyboard support SMBIOS 2.3 UEFI

Operating Environment / Compliance

RoHS	<ul style="list-style-type: none"> RoHS Compliant
Environmental Spec.	<ul style="list-style-type: none"> Operating Temperature: 10°C to 35°C (50°F to 95°F) Non-operating Temperature: -40°C to 70°C (-40°F to 158°F) Operating Relative Humidity: 8% to 90% (non-condensing) Non-operating Relative Humidity: 5% to 95% (non-condensing)

Parts List

Parts List - (Items Included)			
	Part Number	Qty	Description
Motherboard / Chassis	MBD-X9DRI-LN4F+	1	Super X9DRI-LN4F+ Motherboard
	CSE-826BE1C-R920LPB	1	2U Chassis
Backplane	BPN-SAS3-826EL1	1	SAS 12G single expander backplane, with LSISAS3x28 expander, support 12x 3.5
Cable 1	CBL-SAST-0532	2	Internal Mini-SAS HD to Mini-SAS HD 50cm,30AWG,12Gb/s,HF,RoHS/REACH,PBF
Cable 2	CBL-SAST-0531	2	Internal Mini-SAS HD to Mini-SAS HD 80cm,30AWG,12Gb/s, HF,RoHS/REACH,PBF
CD	CDR-X9	1	Driver CD for X9 series
Heatsink / Retention	SNK-P0048P	2	2U Passive CPU Heat Sink for X9, X10 Generation Systems Equipped w/ a Square ILM MB
Drive Tray(s)	MCP-220-00075-0B	12	Black 3.5" HDD tray
Add On Card	AOC-S3108L-H8IR-O-P	1	SAS-3, GEN-3 RAID card. Supports 12Gbps and RAID 0, 1, 5, 6, 10, 50 and 60. Includes 2GB memory
Add On Module	AOM-SAS3-16I16E-LP	1	16-port Mini SAS HD Int-to-Ext cable adapter w/ LP bracket, RoHS/REACH, PBF

Optional Parts List			
	Part Number	Qty	Description
Parts for 3108 controller	BTR-TFM8G-LSICVM02	-	SuperCap Module
	MCP-240-00127-0N	-	Convert Kit
	BKT-BBU-BRACKET-05	-	Mounting PCIe Card
HDD Bracket	MCP-220-82611-0N	-	Dual 2.5 fixed HDD tray