


WAFER-LX

3.5" SBC with on-board AMD Geode™ LX 800 Processor VGA/LVDS/TTL, Dual LAN and SATA

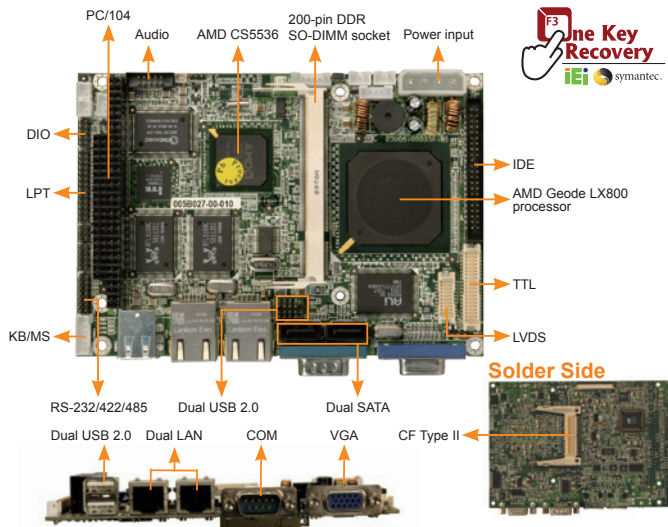


Features

- 3.5" form factor embedded board with AMD Geode™ LX 800 processor and RoHS compliant
- 333/400 MHz DDR SDRAM SO-DIMM supports up to 1 GB
- Complete I/O support with two SATA, IDE, CF Type II, PC/104, dual LAN and four USB 2.0
- 24-bit TTL/18-bit single-channel LVDS
- Value embedded applications with low power and fanless design. Support Windows® XP/CE/XPe
- The best choice for thin client Windows® CE 5.0, XPe OS image with ICA, RDP and IE APs ready
- IEI One Key Recovery solution allows you to create rapid OS backup and recovery

Specifications

- ◆ CPU: AMD Geode™ LX800 (500 MHz) processor
- ◆ Chipset: AMD CS5536
- ◆ BIOS: Award BIOS
- ◆ System Memory: One 200-pin 400/333 MHz DDR SDRAM SO-DIMM slot supports up to 1 GB
- ◆ Ethernet: Dual LAN: 10/100Mbps RTL8100C Ethernet Controller
- ◆ External I/O Interface: 1 x RS-232, 2 x USB 2.0
- ◆ Internal I/O Interface: 1 x CF Type II, 1 x IDE (2x22 pin, P=2.0), 1 x LPT (2x13 pin, P=2.0), 1 x KB/MS (1x6 pin), 1 x RS-232 (2x5 pin, P=2.0), 1 x RS-422/485 (2x2 pin, P=2.0), 2 x SATA 1.5Gb/s (RAID 0, 1 support), 2 x USB 2.0 (2x4 pin, P=2.0)
- ◆ Expansion: 1 x PC/104
- ◆ Digital I/O: 8-bit digital I/O (2x5 pin)
- ◆ Audio: Realtek ALC203 with AC'97 codec
- ◆ Display Output: 1 x VGA (up to 1920x1440@60Hz), 1 x 18-bit single-channel LVDS (up to 1280x1024@60Hz)
- ◆ Infrared Interface: 1 x Infrared interface (1x5 pin)
- ◆ Watchdog Timer: Software programmable supports 1~255 sec. system reset
- ◆ Power Supply: 5V only DC input, 1 x Internal power connector (1x4 pin) Support AT/ATX mode
- ◆ Power Consumption: 5V@1.53A (AMD LX800 with one 1 GB 400 MHz DDR memory)
- ◆ Operating Temperature: 0°C ~ 60°C
- ◆ Storage Temperature: -10°C ~ 70°C
- ◆ Operating Humidity: 5% ~ 95%, non-condensing
- ◆ Dimensions: 146 mm x 102 mm
- ◆ Weight: GW: 670g / NW: 230g

Dimensions (Unit: mm)

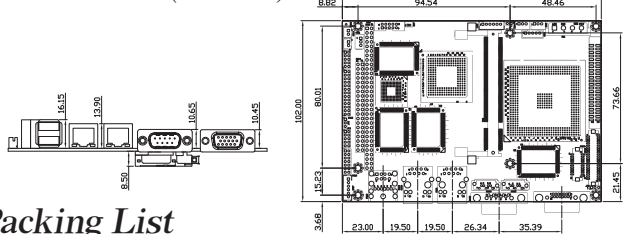

Packing List


1 x WAFER-LX single board computer	1 x Audio cable
1 x KB/MS Y cable	1 x IDE flat cable 44p/44p
1 x RS-232/422/485 cable	1 x Mini jumper pack
1 x SATA power cable	1 x One Key Recovery CD
1 x USB cable	1 x QIG
2 x SATA cable	1 x Utility CD

Ordering Information

Part No.	Description
WAFER-LX-800-R12	3.5" SBC with AMD Geode™ LX 800 processor, audio, VGA/LVDS/TTL, dual LAN and SATA connectors
32200-015100-RS	LPT cable, 280mm, P=2.0

WAFER-LX2

3.5" SBC with AMD Geode™ LX 800 Processor, Eight COM, DDR 400 MHz, VGA/LVDS/TTL Display Interfaces, PC/104, Four USB 2.0, Embedded OS Support

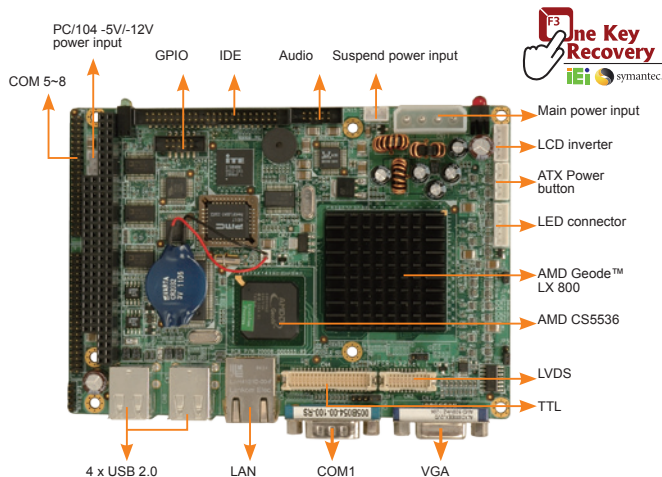


Features

- 3.5" form factor with AMD Geode™ LX 800 CPU
- One 333/400 MHz DDR SO-DIMM socket supports up to 1 GB memory
- VGA, 24-bit TTL, 18-bit LVDS display interfaces
- Seven RS-232 and one RS-232/422/485
- IEI One Key Recovery solution allows you to create rapid OS backup and recovery

Specifications

- ◆ CPU: AMD Geode™ LX 800 (500 MHz)
- ◆ Chipset: CS5536
- ◆ BIOS: Award BIOS
- ◆ System Memory: One 200-pin 400/333 MHz DDR SDRAM SO-DIMM slot supports up to 1 GB
- ◆ Ethernet: LAN: 10/100Mbps RTL8100C Ethernet Controller
- ◆ External I/O Interface: 1 x RS-232, 4 x USB 2.0
- ◆ Internal I/O Interface: 1 x CF Type II, 1 x IDE (2x22 pin, P=2.0), 1 x RS-232/422/485 (2x7 pin, P=2.0), 6 x RS-232 (2x5 pin, P=2.0)
- ◆ Expansion: 1 x PC/104 (ISA Bus)
- ◆ Digital I/O: 8-bit digital I/O (2x5 pin)
- ◆ Display Output: 1 x VGA (up to 1920x1440@60Hz), 1 x 24-bit single-channel TTL (up to 1600x1200@60Hz), 1 x 18-bit single-channel LVDS (up to 1280x1024@60Hz)
- ◆ Audio: Realtek ALC203 with AC'97 codec
- ◆ Watchdog Timer: Software programmable supports 1 ~ 255 sec. system reset
- ◆ Power Supply: 5V only DC input, 1 x Internal power connector (1x4 pin) Support AT/ATX mode
- ◆ Power Consumption: 5V@1.33A (AMD Geode™ LX 800 with one 1 GB 400 MHz DDR memory)
- ◆ Operating Temperature: 0°C ~ 60°C (32°F ~ 140°F)
- ◆ Storage Temperature: -10°C ~ 70°C
- ◆ Operating Humidity: 5% ~ 95%, non-condensing
- ◆ Dimensions: 146 mm x 102 mm
- ◆ Weight: GW: 670g / NW: 230g

Dimensions (Unit: mm)

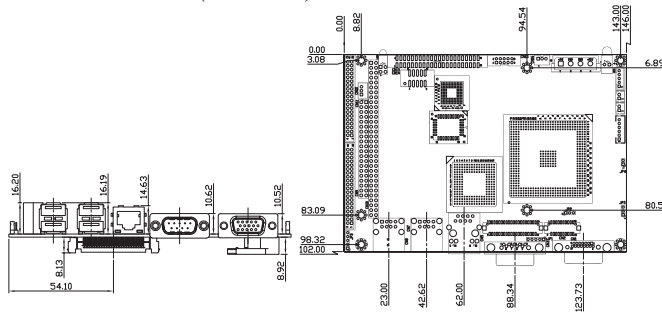

Packing List

1 x WAFER-LX2 single board computer	1 x Mini jumper pack
1 x Audio cable	1 x One Key Recovery CD
1 x IDE flat cable 44p/44p	1 x QIG
2 x Quad RS-232 adapter cable	1 x Utility CD

Ordering Information

Part No.	Description
WAFER-LX2-800-R12	3.5" SBC with AMD Geode™ LX 800 processor, Audio, VGA/LVDS, TTL/LVDS, four USB 2.0, seven RS-232 and one RS-232/422/485