
JBC330U95


Fanless 10th Gen Intel i5 Embedded Barebone 2 Intel GbE / 3*Displays / M.2 / 12V-24V



Features

- Fanless Embedded Barebone System with Planned Lifecycle Through Q2'2031
- Fanless 10th Gen Intel i5 Processors for High Performance with Low Power
- > Supports DDR4-2666 up to 64GB Total Memory
- > Up to 3 * 4K Displays, 2*HDMI, 1*Displayport
- > 2 *Intel Gigabit LAN, HD Audio
- > M.2 SATA 2242, M.2 2230 (for WIFI)
- > 4 * USB 3.2 Gen2 (10Gb/s) ports, Serial Port
- > Watchdog Timer, 12-24V DC-In, 60W AC Adapter
- > Heavy Duty Operating Temperature -10C to 50C
- Includes Wall and VESA Mounts

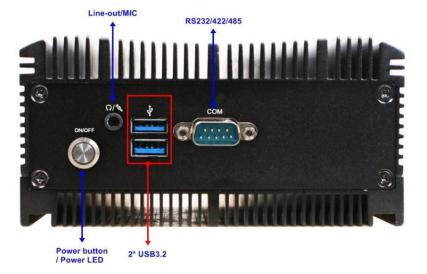

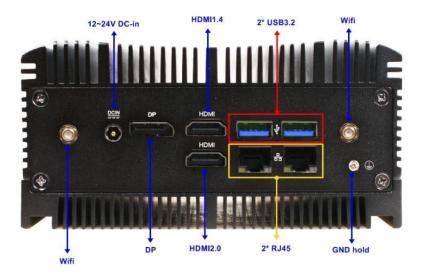

Model	■ JBC330U95
Part No	 HBJC330U95-10210 HBJC330U95I-10210 (AC WIFI)
Processor	Fanless 10 th Gen Intel i5-10210U Comet Lake-U 15W SoC processor
Memory	2 * 260-pin DDR4-2666 SO-DIMM up to 64GB total memory
Storage	1 * M.2 SATA M-key 2242
Network	 1 * Intel i219-LM gigabit LAN (iAMT) 1 * Intel i211-AT gigabit LAN WIFI Model: includes Intel 9260 M.2 AC-WIFI card (non-vPro) Non-WIFI Model: open M.2 2230 E-key slot for WIFI (CNVI/USB/PCIE)
Other Features	Watchdog Timer 10-255 min/sec., AT/ATX Power Mode, HD Audio
Front Panel I/O	 Power button with LED 2 * USB 3.2 Gen2 (10Gb/s) ports 3.5mm Line-out/Mic-in combo jack 1 * Serial port (RS232/422/485)
Rear Panel I/O	 2 * USB 3.2 Gen2 (10Gb/s) ports 2 * RJ45 1 * HDMI 2.0 4K @60Hz 1 * HDMI 1.4b 4K @24Hz 1 * Displayport 4K @60Hz (video only) 12V-24V DC-in jack, Antenna holes
BIOS	AMI Flash ROM
Box Contents	60W 12V AC Adapter, US Power Cord, Wall/VESA Mount, Antenna (WIFI model)
Compliance	CE, FCC, RoHS, ErP Ready
Temperature	 Operating Temperature -10~50 ° C Storage Temperature -20-60 ° C
Dimensions	150 x 106 x 75mm (DxWxH)
Warranty	2 Year limited warranty ange without notice, not responsible for typographical errors. Does not include memory. HDD, optical, or OS.

*Specifications subject to change without notice, not responsible for typographical errors. Does not include memory, HDD, optical, or OS.