

ESC8000A-E12

New Generation, High Performance 4U Server



4U



2



24

ESC8000A-E12 is an AMD EPYC™ dual-socket server built for the demands of enterprise AI infrastructure to deliver unprecedented performance with industry-leading GPUs, faster GPU interconnect and higher-bandwidth fabric, and supports up to eight dual-slot active or passive GPUs scalable configuration with a choice of NVIDIA NVLink® Bridge or AMD Infinity Fabric™ Link to enable scaling of performance with increased bandwidth — ready to match your AI and HPC workloads.

FEATURE

- AMD EPYC 9004 Series Processors with AMD 3D V-Cache technology
- PCIe 5.0 Ready
- 2+2 Redundant 80 PLUS Titanium Power Supply
- GPU and Bluefield DPU Support
- Comprehensive cooling solutions
- Enhanced Security

4th Gen AMD EPYC™ Processors with AMD 3D V-Cache technology

Powered by AMD EPYC 9004 processors with 96 Zen 4 cores, support for a maximum TDP of up to 400 watts per socket, and with AMD 3D V-Cache technology.

PCIe 5.0 Ready

PCI Express® (PCIe®) 5.0 delivers 32 GT/s bandwidth, which is double the speed of PCIe 4.0, offering lower power consumption, better lane scalability and backwards compatibility.

2+2 Redundant 80 PLUS Titanium Power Supply

ESC8000A-E12 supports up to four 3000 W 80 PLUS® Titanium redundant power supplies to reduce operating costs and enable easier servicing.

GPU and Bluefield DPU Support

Up to eight dual-slot active or passive GPUs, NVIDIA NVLink® bridge, and NVIDIA Bluefield DPU support to enable performance scaling

Comprehensive cooling solutions


Air or liquid-cooled solutions. ESC8000A-E12 supports liquid-cooled NVIDIA® A100 PCIe GPU that delivers powerful performance with less energy and provides direct-to-chip (D2C) cooling or immersion-cooling solutions for maximum data-center energy efficiency.

Enhanced Security

ASUS servers also include support Trusted Platform Module 2.0 (TPM 2.0) to secure hardware through integrated cryptographic keys and offer regular firmware update for vulnerabilities.

Target market

- Virtual Machines
- Data Center
- HPC
- AI Training
- All-flash Storage
- HCI

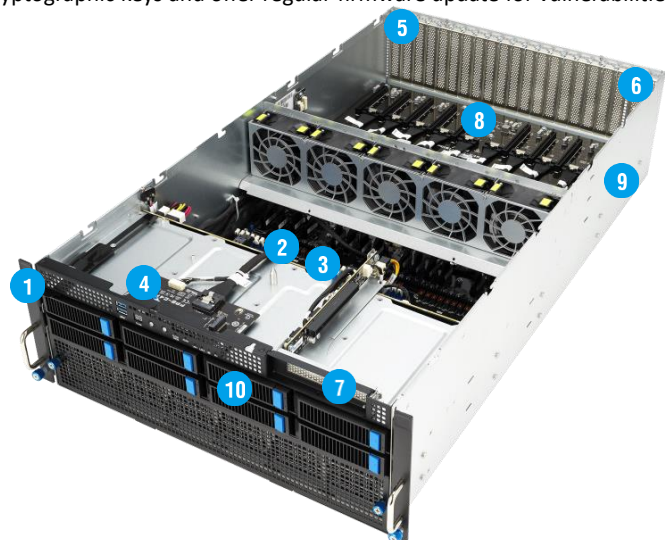

1. Asset Tag
2. 24 x DIMM, DDR5 4800/4400 RDIMM/ 3DS RDIMM
3. AMD EPYC™ 9004 Series
4. 1 x M.2 (Up to 22110)
5. 1 x PCIe slot for NIC (Gen5 x16 link)
6. 1 x PCIe slot for NIC (Gen5 x8 link) or OCP3.0 (Gen5 x16 links)
7. 1 x PCIe slot for HBA/RAID cards (Gen5 x8 link,LP,HL)
8. 8 x PCIe slot for GPU (Gen5 x16 link, support up to eight dual slot GPU)
9. 2+2 Redundant 2600W~3000W 80 PLUS Titanium Power Supply
10. 8 x 3.5" Hot-swap HDD Bays



ESC8000A-E12

SPECIFICATION

Processor Support

2 x Socket SP5 (LGA 6096)

Core Logic		AMD EPYC™ 9004 Series 4 th Generation AMD EPYC™ Processors with AMD 3D V-Cache technology
Memory	Total Slots	24 x DIMM slots (12 channel per CPU, 12 DIMM per CPU)
	Capacity	Maximum up to 3TB per CPU socket
	Memory Type	DDR5 4800/4400 RDIMM/ 3DS RDIMM *Refer to ASUS server AVL for the latest update
	Memory Size	64GB, 32GB, 16GB RDIMM 256GB, 128GB RDIMM 3DS *Refer to ASUS server AVL for the latest update
Expansion Slots	Total PCI/PCI-X/PCI-E/PIKE Slots	11
	Slot Type	1 x PCIe x8 slot (Gen5 ,LP,HL) for HBA/RAID cards 8 x PCIe x16 slot (Gen5, FH,FL) for dual-slot GPU card 1 x PCIe x16 slot (Gen5 ,FH,FL) for NIC card 1 x PCIe x8 slot (Gen5 FH,FL) for NIC Card or Gen5 x16 OCP socket option
Disk Controller	SATA Controller	4 x SATA 6Gbps ports 1 x M.2 connector (PCIe Gen3 x4 link)
	SAS Controller	Optional kits: -Broadcom MegaRAID 9560-16i -Broadcom MegaRAID 9540-8i - ASUS PIKE II 3008 8-port HBA Card - ASUS PIKE II 3108 8-port HW RAID Card
Storage Bays	I = internal A or S will be hot-swappable	8 x 3.5" Front Hot-swap Storage Bays (backplane supports up to 8 x NVMe/SATA/SAS*) *SAS support required an HBA/RAID card.
Networking	LAN	2 x 10GbE LAN ports (RJ45, X710-AT2) or 2 x Gigabit LAN ports (RJ45, I350-AM2) 1 x Management Port (RJ45)
Graphic	VGA	Aspeed AST2600 64MB
Front I/O Ports		2 x USB 3.2 Gen1 ports 1 x VGA port
Rear I/O Ports		1 x COM port 2 x 10GbE/1GbE LAN ports (RJ45, build for order) 1 x Management port (RJ45)
Switch/LED		Front Switch/LED: 1 x Power Button w/LED, 1 x Location Button w/LED, 1 x Message LED, 1 x Q-Code/Port 80 LED, 1 x Clear CMOS LED, 1 x Reset LED, 1 x M.2 LED Rear Switch/LED: 1 x Power Button w/LED, 1 x Location Button w/LED
OS Support		Windows Server RedHat® Enterprise Linux, SuSE® Linux Enterprise Server, CentOS, Ubuntu, VMware *Please find the latest OS support from https://www.asus.com/event/Server/OS_support_list/OS.html
Management Solution	Software	ASUS Control Center (Classic)
	Out of Band Remote Management	On-Board ASMB11-iKVM for KVM-over-IP
Dimension		800mm x 440mm x 174.5 mm (4U) 31.5''x17.32''x 6.87''
Net Weight Kg (CPU, DRAM & HDD not included)		27 kg
Gross Weight Kg (CPU, DRAM & HDD not included, Packing include)		52 kg
Power Supply (following different configuration by region)		2+2 Redundant 2600W/3000W 80 PLUS Platinum Power Supply 2+1 Redundant 3000W 80 PLUS Platinum Power Supply Rating: 220-240 Vac, 15.5A(x4), 50-60 Hz
Environment		Operation temperature: 10°C ~ 35°C Non operation temperature: -40°C ~ 70°C Non operation humidity: 20% ~ 90% (Non condensing)

附錄

- 1
- 2
- 3
- 4
- 5
- 6
- 7
- 8
- 9
- 10
- 11
- 12
- 13
- 14
- 15
- 16
- 17
- 18
- 19
- 20



info



CPU Number

info



Memory Number

info

FEATURE

- Font type / Calibri
- Color / BK

Title

Introduce example paragraph With 32 DIMM slots that support up to 2TB of fast, DDR4-3200MHz 3DS ECC RDIMMs or LRDIMMs, ASUS RS720A-E11-RS24U delivers industry-leading memory capability for your business.



Make your QR code Website :

<https://www.unitag.io/qrcode>

Rules:

Color : **#002F87** | Look: Modules: **Light roundness** , Eyes: **Roundness and circle**

Size: **2.08 x 2.08 cm**

Under ASUS NDA