


SuperServer 6027TR-H71QRF

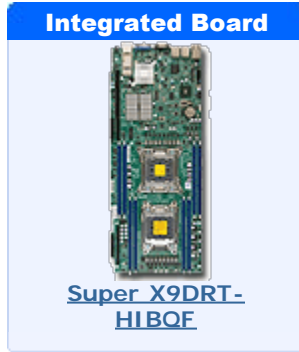

Available Colors: Black

Key Features

Four hot-pluggable systems (nodes) in a 2U form factor. Each node supports the following:

1. Dual socket R (LGA 2011) supports Intel® Xeon® processor E5-2600 and **E5-2600 v2** family†
2. Up to 512GB ECC DDR3, up to 1866MHz; 8x DIMM sockets
3. 1x PCI-E 3.0 (x16) low-profile slot
4. Intel® i350 Dual port Gigabit Ethernet
5. 3x Hot-swap 3.5" SATA3/SAS2 HDD Bays
6. Onboard Mellanox ConnectX QDR InfiniBand Controller, QSFP interface
7. 1620W Redundant Power Supplies **Platinum Level (94%)**

Note: Image above may show a varied configuration or optional parts, Please refer to parts list for standard parts included.

Specifications

Product SKUs

- SYS-6027TR-H71QRF** ■ SuperServer 6027TR-H71QRF (**Black**)

Motherboard

Super X9DRT-HIBQF

Processor/Cache

- CPU**
- Dual Socket R (LGA 2011)
 - Intel® Xeon® processor E5-2600 and **E5-2600 v2** family† (up to 135W TDP *)
- * Please contact your Supermicro sales representative for additional details

Note † BIOS version 3.0 or above is required

Cache ■ Up to 30MB

System Bus ■ QPI up to 8 GT/s

System Memory

- Memory Capacity**
- 8x 240-pin DDR3 DIMM sockets
 - Up to 512GB DDR3 ECC LRDIMM
 - Up to 256GB DDR3 ECC Registered memory (RDIMM)
 - 866/1600/1333/1066/800MHz ECC

Chassis

Form Factor ■ 2U Rackmount

Model ■ **CSE-827HQ-R1620B**

Dimensions

Width ■ 17.25" (438mm)

Height ■ 3.47" (88mm)

Depth ■ 28.5" (724mm)

Gross Weight ■ 85 lbs (38.6kg)

Available Colors ■ Black

Front Panel

Buttons

- Power On/Off button
- System Reset button
- UID button

LEDs

- Power status LED
- HDD activity LED
- 2x Network activity LEDs
- Universal Information (UID) LED

Expansion Slots (per Node)

PCI-Express ■ 1x PCI-E 3.0 (x16) Low-profile slot

Memory Type	DDR3 SDRAM 72-bit, 240-pin gold-plated DIMMs
DIMM Sizes	<ul style="list-style-type: none"> 32GB, 16GB, 8GB, 4GB, 2GB, 1GB
Memory Voltage	<ul style="list-style-type: none"> 1.5 V, 1.35 V
Error Detection	<ul style="list-style-type: none"> Corrects single-bit errors Detects double-bit errors (using ECC memory)
On-Board Devices	
Chipset	<ul style="list-style-type: none"> Intel® C602 Chipset
Infiniband	<ul style="list-style-type: none"> Mellanox ConnectX-3 QDR Infiniband 40Gbps Controller
SAS	<ul style="list-style-type: none"> LSI 2108 SAS (6Gbps) w/ Hardware RAID support RAID 0, 1, 5, 6, 10, 50, 60 support Note: In order to support the LSI RAID Controllers, both CPU socket must be populated
SATA	<ul style="list-style-type: none"> SATA 2.0 & 3.0 with RAID 0, 1, 5, 10
IPMI	<ul style="list-style-type: none"> Support for Intelligent Platform Management Interface v.2.0 IPMI 2.0 with virtual media over LAN and KVM-over-LAN support Nuvoton WPCM450 BMC
Network Controllers	<ul style="list-style-type: none"> Intel® i350 Dual Port Gigabit Ethernet Virtual Machine Device Queues reduce I/O overhead Supports 10BASE-T, 100BASE-TX, and 1000BASE-T, RJ45 output 1x Realtek RTL8201N PHY (dedicated IPMI)
Graphics	<ul style="list-style-type: none"> Matrox G200eW
Input / Output (per Node)	
Serial ATA	<ul style="list-style-type: none"> 2x SATA 3.0 ports (6Gbps) 5x SATA 2.0 ports (3Gbps)
SAS	<ul style="list-style-type: none"> 8x SAS2 ports (6Gbps)
LAN	<ul style="list-style-type: none"> 2x RJ45 Gigabit Ethernet LAN ports 1x RJ45 Dedicated IPMI LAN port
USB	<ul style="list-style-type: none"> 3x USB 2.0 ports total (2x rear + 1x Type A)
VGA	<ul style="list-style-type: none"> 1x VGA port
Serial Port / Header	<ul style="list-style-type: none"> 1x Fast UART 16550 port / 1 Header
Infiniband	<ul style="list-style-type: none"> 1 external QSFP Infiniband connector

Drive Bays (per Node)	
Hot-swap	<ul style="list-style-type: none"> 3x Hot-swap 3.5" SATA3/SAS2 HDD trays
System Cooling	
Fans	<ul style="list-style-type: none"> 4x 8cm heavy duty PWM fans with optimal fan speed control
Power Supply	
1620W high-efficiency redundant power supply w/ PMBus	
AC Input	<ul style="list-style-type: none"> 1000W Output @ 100-120V, 12-10A, 50-60Hz 1200W Output @ 120-140V, 12-10A, 50-60Hz 1620W Output @ 180-240V, 10.5-8A, 50-60Hz
DC Output	<ul style="list-style-type: none"> 1000W: +12V/84A; +5Vsb/4A 1200W: +12V/100A; +5Vsb/4A 1620W: +12V/150A; +5Vsb/4A
Certification	  Platinum Certified [Test Report]
System BIOS	
BIOS Type	<ul style="list-style-type: none"> 128Mb SPI Flash EEPROM with AMI BIOS
BIOS Features	<ul style="list-style-type: none"> Plug and Play (PnP) APM 1.2 PCI 2.2 ACPI 1.0 / 2.0 USB Keyboard support SMBIOS 2.3 UEFI
Operating Environment / Compliance	
RoHS	<ul style="list-style-type: none"> RoHS Compliant
Environmental Spec.	<ul style="list-style-type: none"> Operating Temperature: 10°C to 35°C (50°F to 95°F) Non-operating Temperature: -40°C to 70°C (-40°F to 158°F) Operating Relative Humidity: 8% to 90% (non-condensing) Non-operating Relative Humidity: 5% to 95% (non-condensing)

Parts List

Parts List - (Items Included)			
	Part Number	Qty	Description
Motherboard / Chassis	MBD-X9DRT-HIBQF	4	Super X9DRT-HIBQF Motherboard
	CSE-827HQ-R1620B	1	2U Chassis
Backplane	BPN-ADP-SAS2-H6IR-O-P	4	BPN-ADP-SAS2-H6IR-O-P
Backplane	BPN-SAS-827HQ	1	SAS Backplane, x12 3.5" HDD, 2U Twin
CD	CDR-X9	1	Driver CD for X9 series
Riser Card	RSC-R1U-E16R-O-P	4	RSC-R1U-E16R
Heatsink / Retention	SNK-P0047PS	4	1U Passive CPU Heat Sink for X9 and X10 Systems w/ Narrow ILM
Heatsink / Retention	SNK-P0047PW	4	1U Passive Customized Rear CPU Heat Sink for X9 Twin Series Motherboards
Power Supply	PWS-1K62P-1R	2	1620W REDUNDANT POWER MODULE
Optional Parts List			
	Part Number	Qty	Description
QSFP Cable	CBL-0417L	-	39.37" (100cm) QSFP to QSFP QDR
QSFP Cable	CBL-0325L	-	78.74" (200cm) QSFP TO QSFP QDR
QSFP Cable	CBL-0446L	-	118.11" (300cm) QSFP to QSFP QDR
QSFP Cable	CBL-0422L	-	196.85" (500cm) QSFP to QSFP QDR
QSFP Cable	CBL-0467L	-	275.59" (700cm) QSFP to QSFP QDR
QSFP Cable	CBL-0468L	-	590.55" (1500cm) QSFP TO QSFP Fiber QDR