

# PMS8715

> 15" Intel Celeron N2930 Industrial Fanless Panel PC



## Features



- Fanless and quiet design
- Flat front panel touch screen
- Intel Celeron N2930 CPU built-in
- Onboard 4GB DDR3L Memory
- Supports wide range voltage DC in (9~36V)
- Aluminum chassis

## Specifications



### System

CPU	Onboard Intel Celeron N2930(1.83GHz) Processor
System Chipset	SoC
Memory	Onboard 4GB DDR3L 1333 MHz

### IO Port

USB	2 x USB 3.0 type A
Serial/Parallel	1 x RS-232 DB-9, COM2 1 x RS-232/422/485 DB-9, COM1, default RS-232
Audio	1 x Audio Line Out
LAN	2 x GbE LAN RJ-45 with Intel 82574L controller
Power	1 x 3-pin DC power input terminal 1 x 2-pin connector for power on/off button

### Storage Space

HDD	1 x SATA 2.5" HDD bay for SATA HDD (easy accessible)
movable device	1 x SD card slot, up to 32GB

### Expansion

Expansion Slot	1 x Internal Mini-PCIe slot full size
----------------	---------------------------------------

### Display

Display Type	15" TFT-LCD
Max. Resolution	1024 x 768
Max. Color	16.2M
Luminance (cd/m <sup>2</sup> )	450
Viewing Angle	160(H) / 140(V)
Contrast Ratio	800 : 1
Backlight Lifetime	50,000 Hrs

### Touch Screen

Type	Resistive Touch Window
Interface	USB
Light Transmission(%)	Resistive Touch Window: over 80%

### Power

Power Input	DC 9~36V
Power Consumption	PMS8715: MAX: 17.8W

### Mechanical

Color	RAL 9007
Construction	Aluminum Die-casting Front Bezel and Chassis
Mounting	Panel Mounting, VESA 100 x 100
IP Rating	IP66 compliant front bezel
Dimensions	410 x 310 x 54.6 mm
Net Weight	PMS8715: 4.4 Kg


### Environmental

Operating Temperature	PMS8715: 0~50°C
Storage Temperature	-20~60°C
Storage Humidity	10 to 90%@ 40°C, non-condensing
Certificate	CE / FCC CLASS A/ UL

## I/O Panel View



## Dimensions

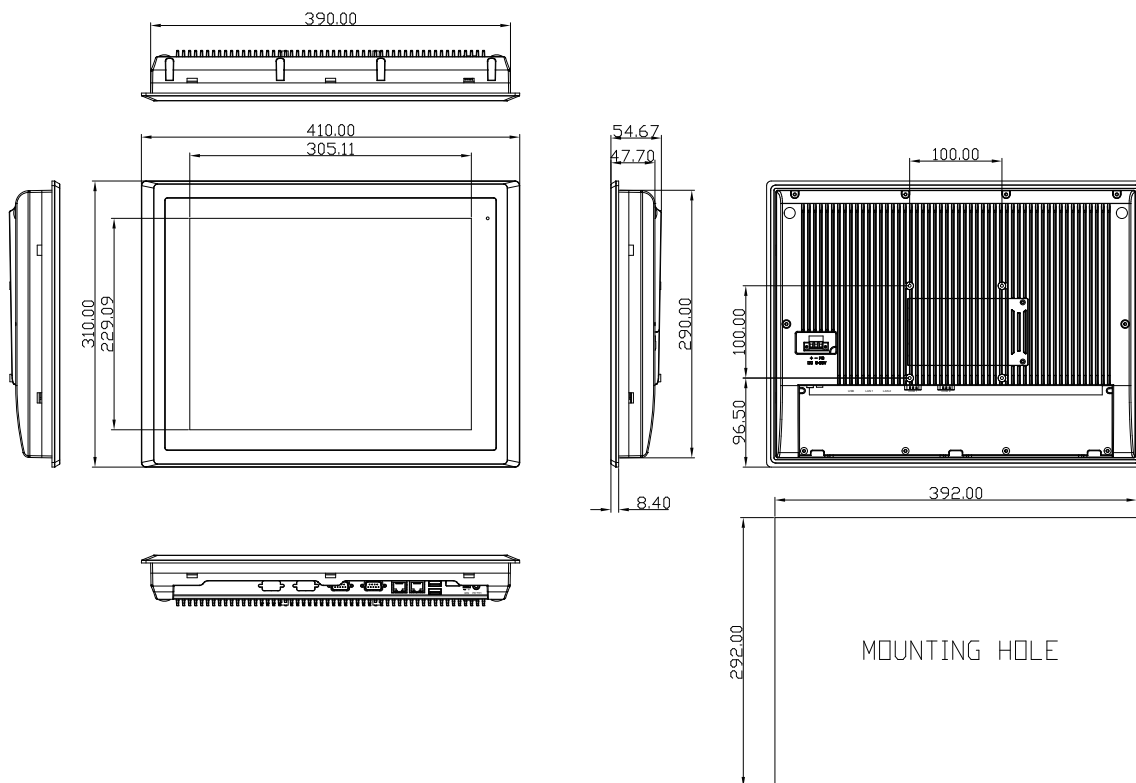

unit: mm