

RS700-E11-RS12U

Scalable, High Performance 1U Server



1U



2



32

ASUS RS700-E11-RS12U is a server powered by 4th Gen Intel Xeon Scalable processors that supports up to 32 DIMMs, one dual-slot GPU, 12 NVMe, three plus one PCIe slots, optional OCP 3.0 slot, dual M.2 and ASUS ASMB11-iKVM.

FEATURE

- Powered by dual-socket 4th Gen Intel Scalable processors.
- CPU maximum TDP of up to 350W with 32 DIMMs and support.
- GPU-optimized design allows one dual-slot GPU for AI workloads and high performance computing(HPC).
- Up to 12 all-flash NVMe
- Up to 3+1 PCIe® 5.0 slots
- Flexible onboard LAN-module design
- Flexible air-cooled solution

4th Gen Intel Xeon Scalable processors

The latest Intel Xeon scalable processors offer up to 5x more cores per CPU and 1.52x computing performance increase. ASUS RS700-E11-RS12U supports dual Intel Scalable processors to enable up to 32 DIMM slots, all flash and PCIe Gen 5.0

PCIe 5.0 Ready

PCI Express® (PCIe®) 5.0 delivers 32 GT/s bandwidth, which is double the speed of PCIe 4.0, offering lower power consumption, better lane scalability and backwards compatibility.

NVIDIA GPU Support

Up to 1 dual-slot GPU such as NVIDIA A100 in 1U system and optimized acceleration for workloads across cloud, data center and for hybrid cloud environment

Flexible Cooling options

Support two Free-air cooling solution on standard heatsink and an enhanced volume air cooling (EVAC) heatsink for efficient cooling performance.


Enhanced Security

PFR FPGA as the platform Root-of-Trust solution for firmware resiliency Trusted Platform Module 2.0 (TPM 2.0) to secure hardware through integrated cryptographic keys and offer regular firmware update for vulnerabilities.

Target market

- High performance computing (HPC).
- AI Forecast of Utilization workload.
- Terabyte-scale data warehousing
- Virtualization applications

1. Asset Tag
2. 32 x DIMM, DDR5-4800/4400, RDIMM/ RDIMM 3DS (2DIMM per Channel)
3. Intel 4th Generation Xeon® Processors
4. Dual M.2 (Up to 2280)
5. 1 x PCI-E x16 (Gen5 x16 link, FHFL) (CPU1), 1 x PCI-E x16 (Gen5 x16 link) or OCP3.0 (CPU1)
6. 1 x PCIe x8 (Gen5 x16 link, Internal) (CPU2)
7. 1 x PCIe Gen5 x16, LP (CPU2)
8. 1+1 Redundant AC: 1200W/1600W 80 PLUS Platinum/Titanium Power Supply
9. 12 x 2.5" Hot-swap Bays
10. 8 x Hot-swap fans

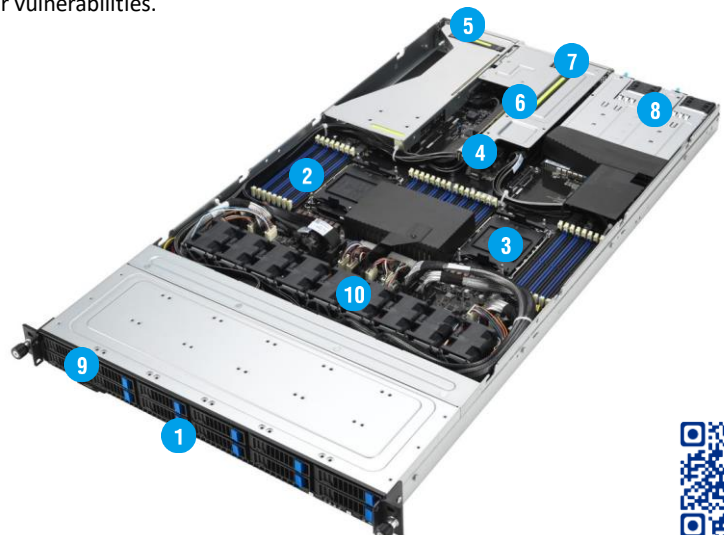

RS700-E11-RS12U

SPECIFICATION

| | | |
|--|--|--|
| Processor Support. | | 2 x Socket E (LGA 4677) 4th Gen Intel® Xeon® Scalable Processors Family(350w) |
| Core Logic | | Intel® PCH C741 |
| Memory | Total Slots | 32 (8-channel per CPU, 16 DIMM per CPU) |
| | Capacity | Maximum up to 4 + 8 TB (DDR5 + Crow Pass) |
| | Memory Type | DDR5 4800/4400 RDIMM/RDIMM 3DS (2DIMM per Channel) 512GB, 256GB, 128GB Intel® Optane™ persistent memory 300 series (Crow Pass) *Refer to Asus server AVL for the latest update |
| | Memory Size | 64GB, 32GB, 16GB RDIMM 256GB, 128GB RDIMM 3DS * Refer to www.asus.com/support for more information |
| Expansion Slots | Total PCI/PCI-X/PCI-E/PIKE Slots | 3 x Expansion slots + 1 x Internal PIKE slot |
| | Slot Type | Up to 3+1 PCIe slot 1 x OCP 3.0 or PCIe G5 x16 FHFL 1 x PCIe G5 x16 FHFL 1 x PCIe G5 x8. LP (Internal) 1 x PCIe G5 x16, LP |
| Disk Controller | SATA Controller | 12 x SATA 6Gb/s ports 2 x M.2 connector (SATA 6Gb/s & PCI-E Gen4 x8 link) |
| | SAS Controller | Optional kits: Broadcom HBA CARD 9500-8i Broadcom MegaRAID 9540-8i Broadcom MegaRAID 9560-16i 12G SAS Support |
| Storage Bays | I = internal A or S will be hot-swappable | 12x 2.5" Hot-Swap Storage Device Bays up to (12x NVMe/SATA/SAS*) 2 x M.2 (Up to 2280) (Support SATA/PCIe M.2) (CPU1) *must with PIKE/RAID card |
| Networking | LAN | 1 x Quad Port Intel I350-AM4 1G LAN Controller or 1 x Dual Port Intel X710-AT2 Gigabit 10G LAN Controller or None 1 x Management Port |
| Graphic | VGA | Aspeed AST2600 64MB |
| Front I/O Ports | | 2 x USB 3.2 Gen 1 ports 1 x VGA port |
| Rear I/O Ports | | 2 x USB 3.2 Gen1 ports, 1 x VGA port , 1 x RJ-45 Management LAN port 2 x 10G or 4 x 1G RJ-45 GbE LAN port (optional) |
| Switch/LED | | Rear Switch/LED: 1 x Q-Code/Port 80 LED, 1 x Power switch, 1 x Location switch/LED Front Switch/LED: 1 x Power switch (/LED), 1 x Location switch (/LED), 1 x Reset switch, 1 x Message LED, LAN 1-4 LED (on NIC module)** ** The number of LAN LEDs available depends on the LAN |
| OS Support | | Windows® Server 2019/2022 64bit RedHat® Enterprise Linux, SuSE® Linux Enterprise Server CentOS, Ubuntu, Vmware Please find the latest OS support from http://www.asus.com/ |
| Management Solution | Software | ASUS Control Center (Classic) |
| | Out of Band Remote Management | On-Board ASMB11-iKVM for KVM-over-IP |
| Dimension | | 842.5mm x 439.5mm x 44mm (1U) (33.17" x 1.73" x 1.73") |
| Net Weight Kg (CPU, DRAM & HDD not included) | | 13.7 kg |
| Gross Weight Kg (CPU, DRAM & HDD not included, Packing include) | | 22.56 kg |
| Power Supply (following different configuration by region) | | 1+1 Redundant AC: 1200W/1600W 80 PLUS Platinum/Titanium Power Supply Rating: 220-240Vac, 10A (x2), 50/60Hz; Rating: 100-127Vac/220-240Vac, 12A/9.5A (x2), 50/60Hz |
| Environment | | Operation temperature: 10°C ~ 35°C Non operation temperature: -40°C ~ 60°C Non operation humidity: 20% ~ 90% (Non condensing) |